



(2) 位置特征线

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

—

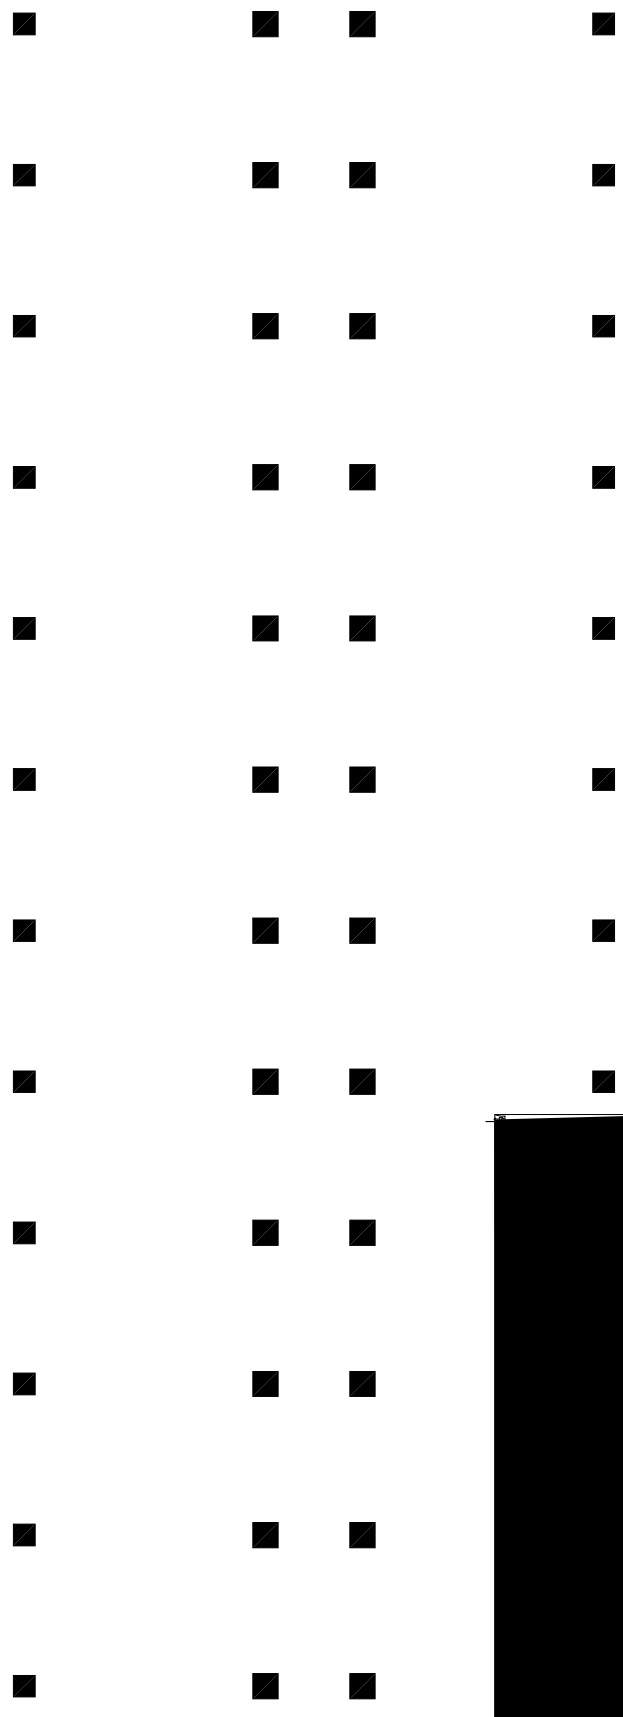

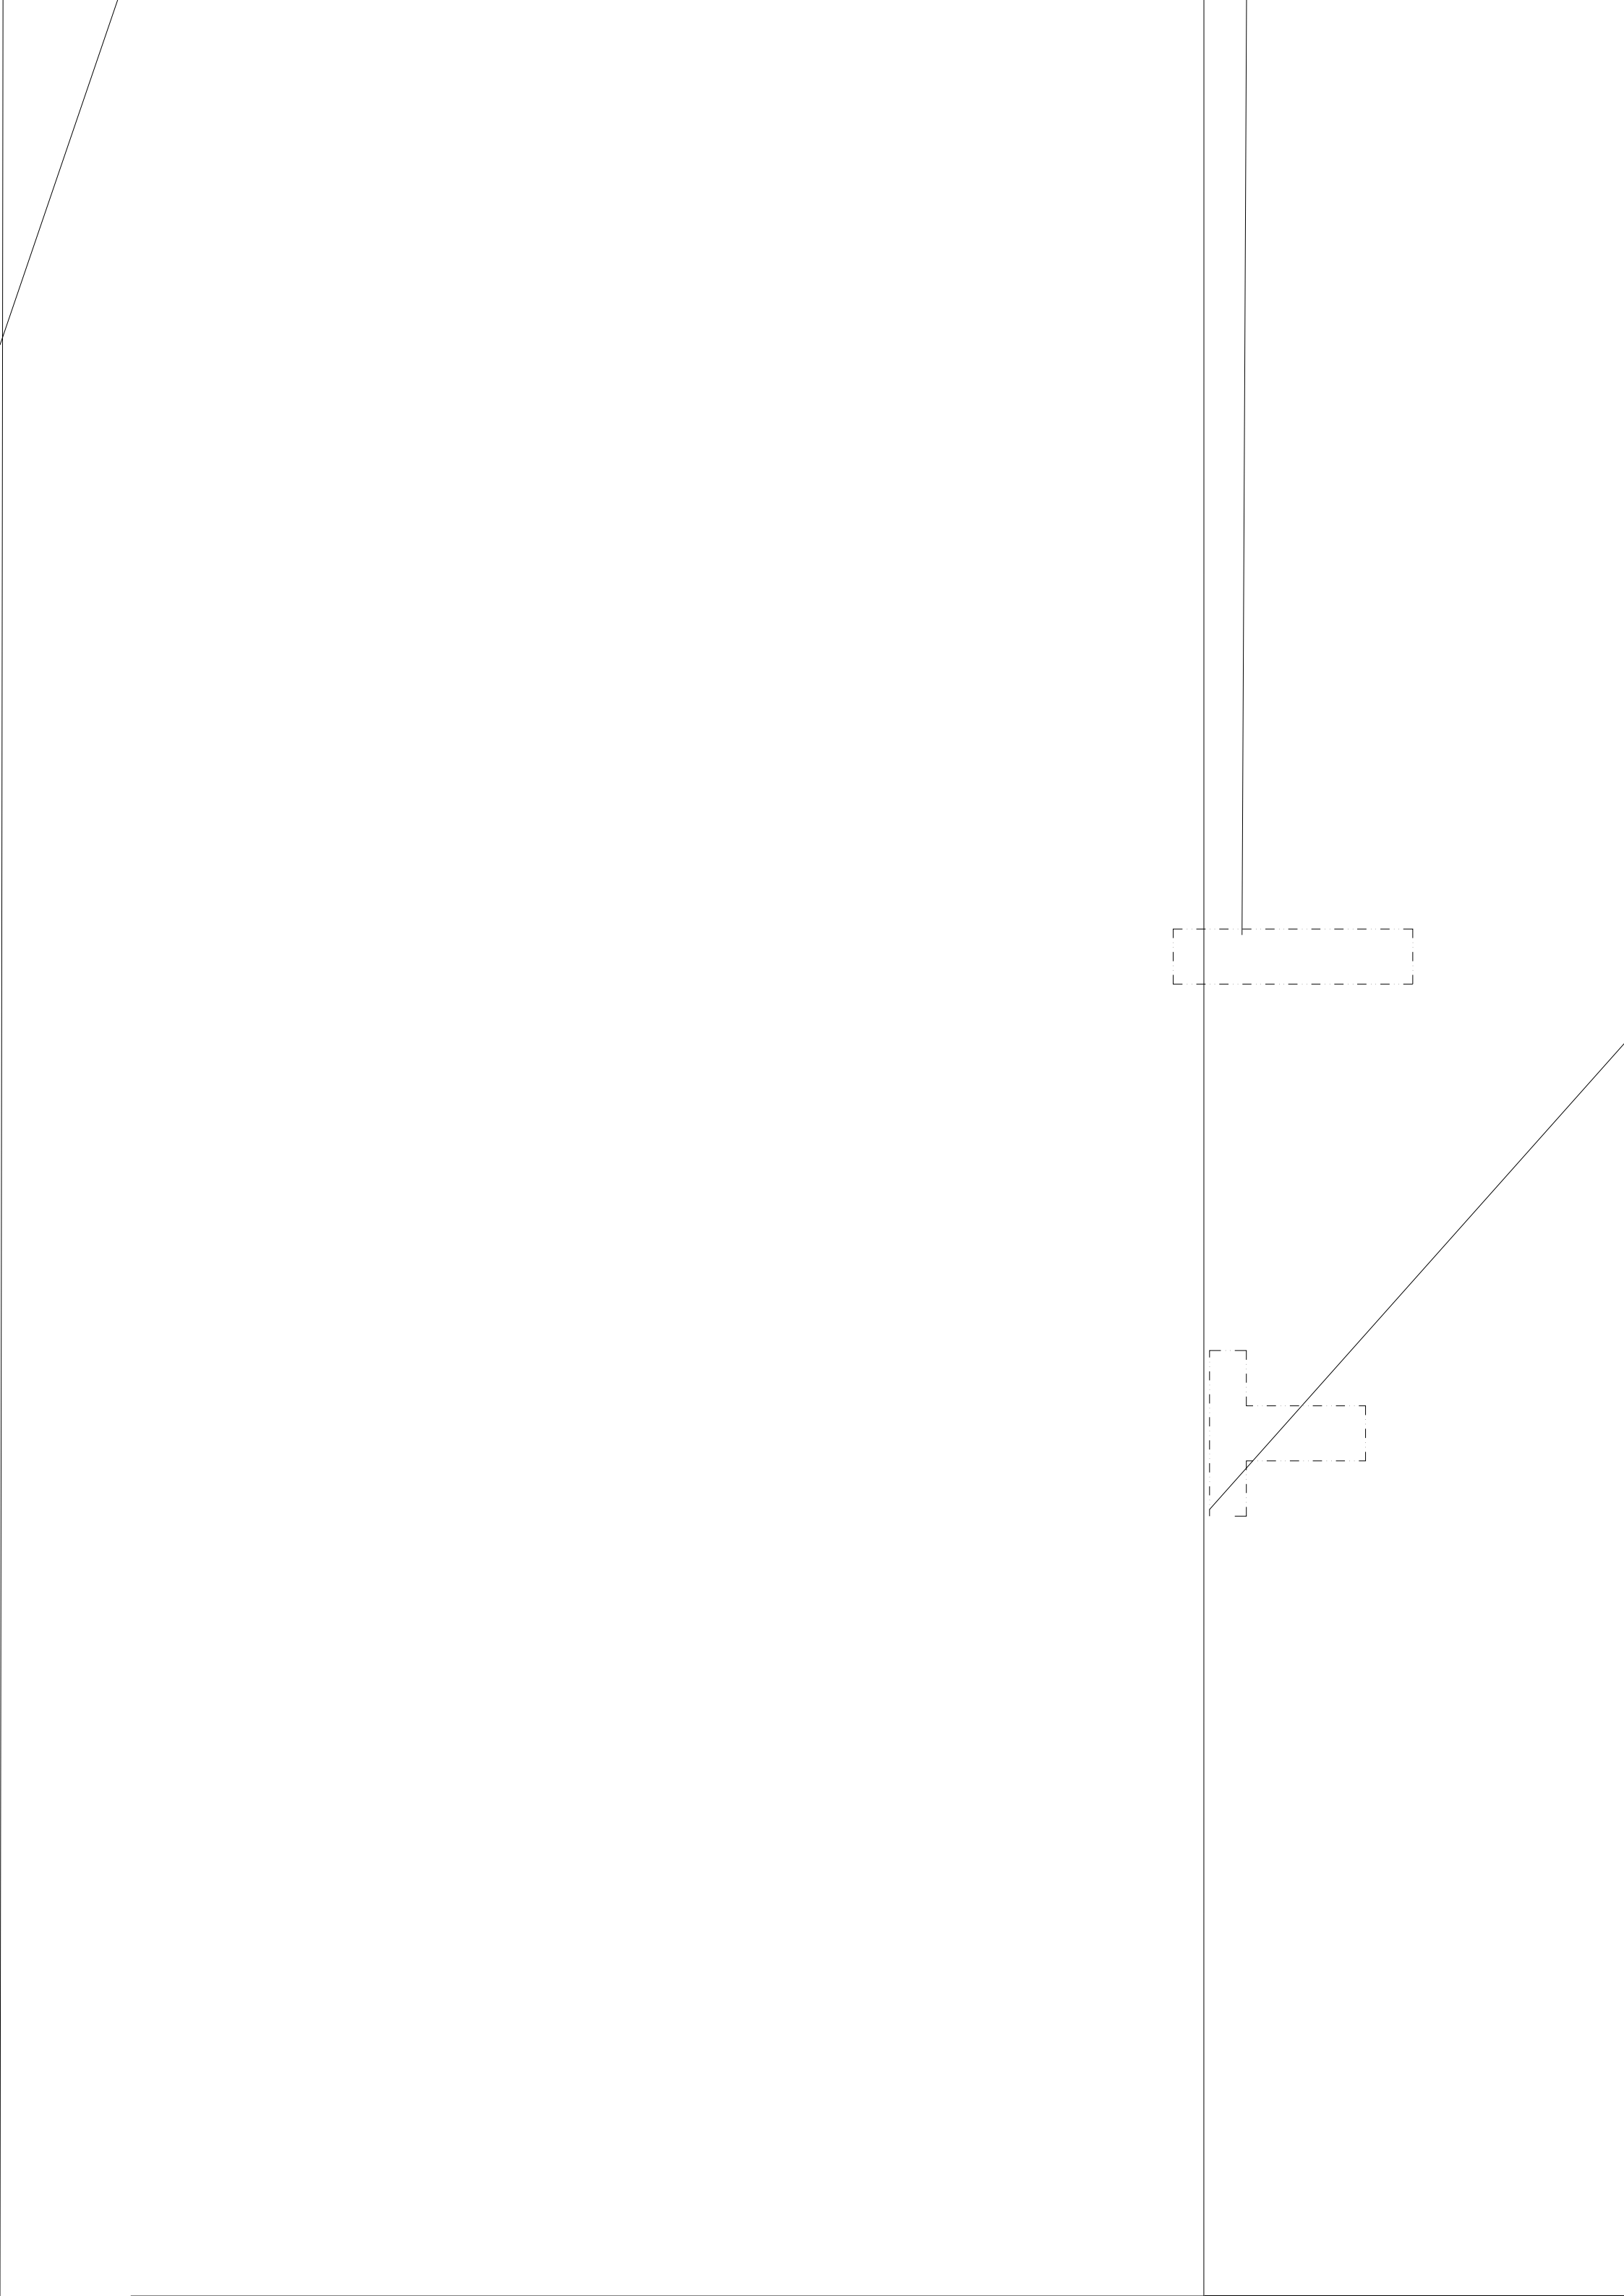


纵向角钢 4L75x6
后墙材料

2M16@500
对穿角钢

墙身纵筋-50x4@300

纵向角钢 2L75x6
后墙材料

纵筋-50x4@300

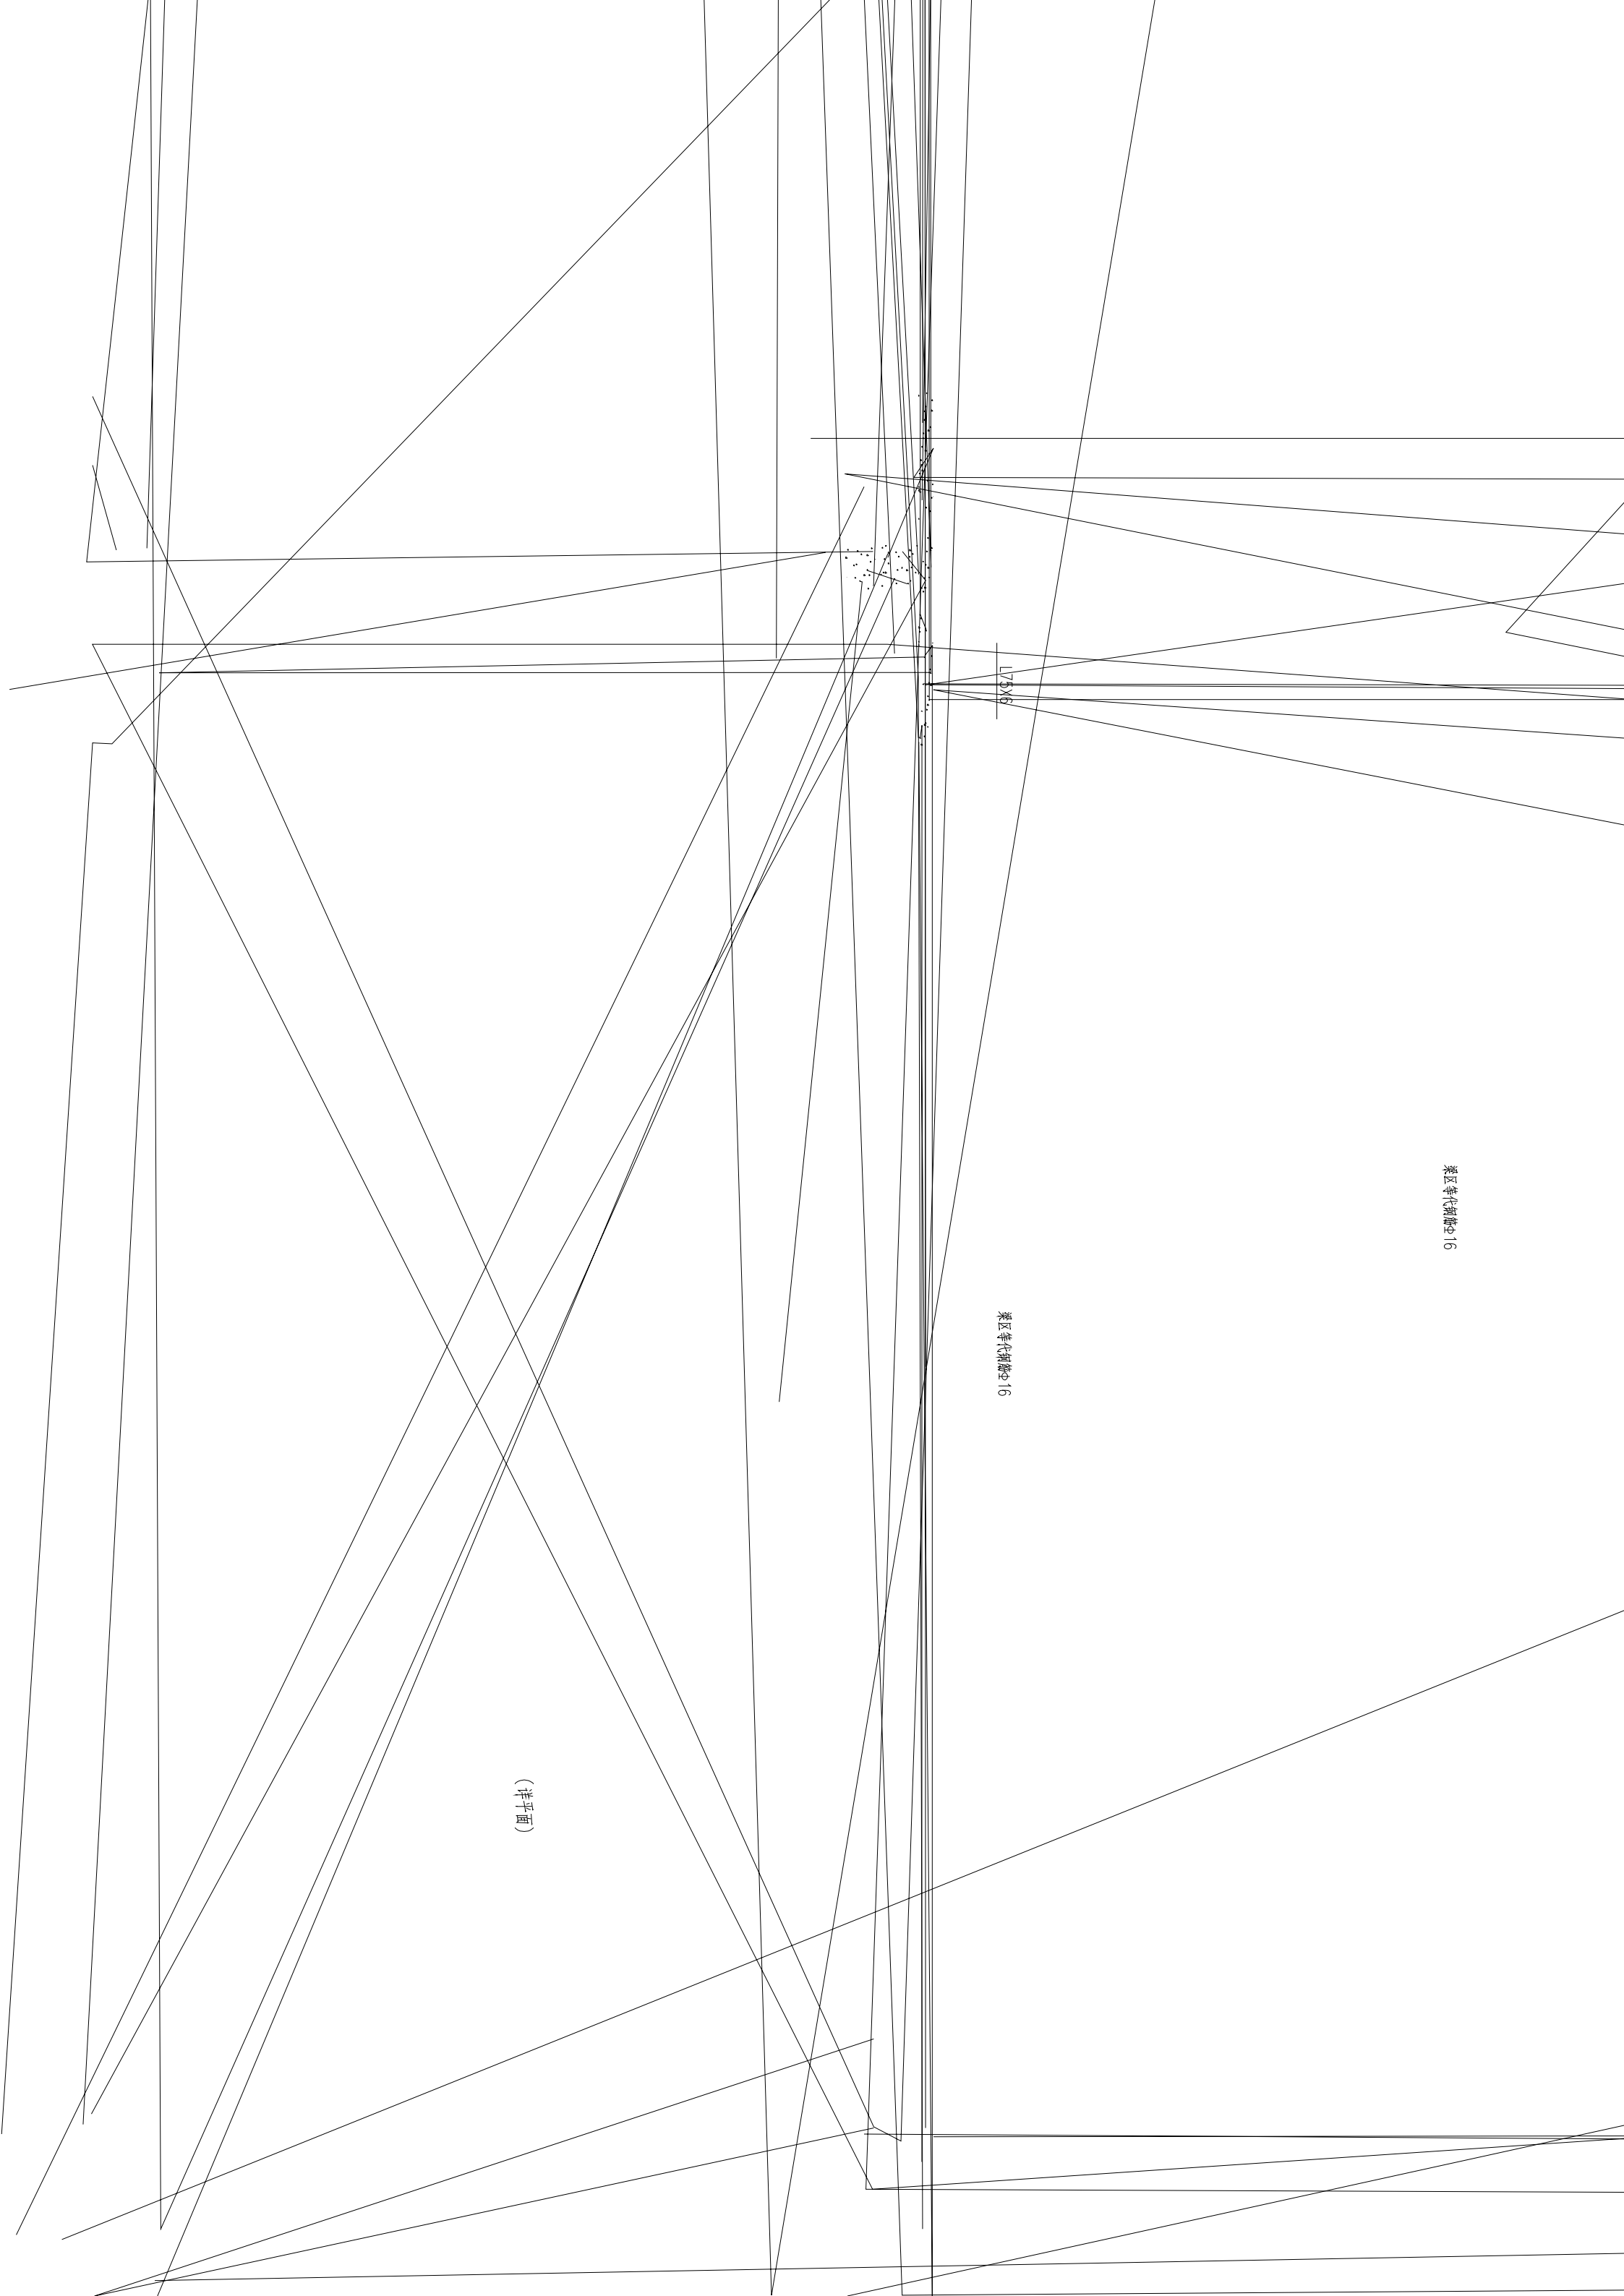

梁区年代洞窟16

梁区年代洞窟16

L73X6

(详平面)

顶层节点大样


中间层节点大样

楼层楼面-2.800

插筋

2. 当梁高 ≥ 800 时，梁区等代箍筋
当梁高 $501 \sim 799$ 时，梁区等代箍筋为二付。

Φ12@400#

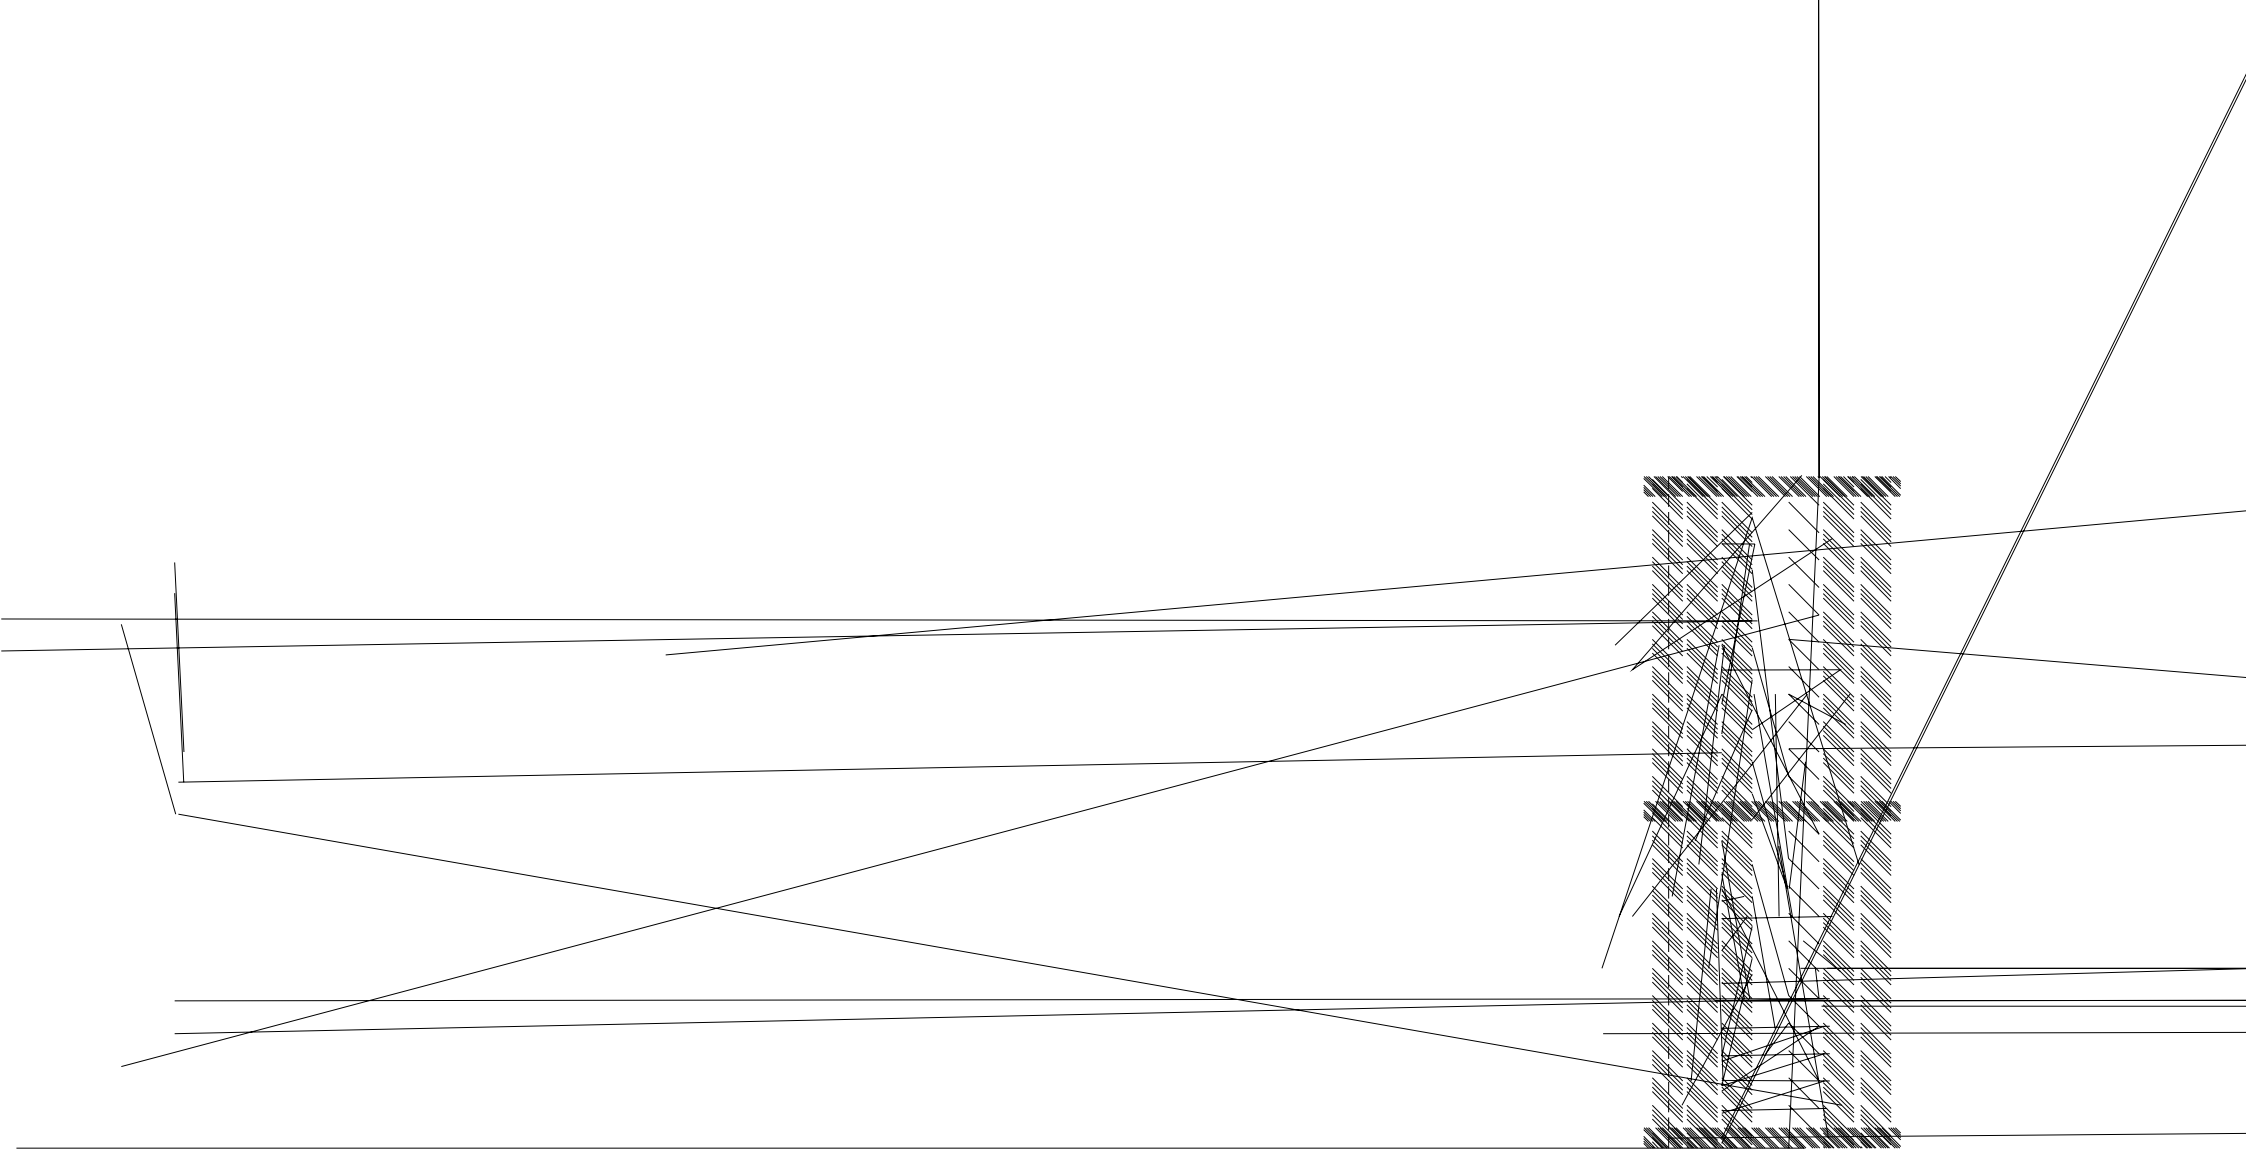

1